




THE FORMULA

Lighting Tips & Tricks

5 Ways to Use a Softbox - Setup 1

Ab Sesay (@absesay_photo) | Watch at: www.sekonic.com/formula05

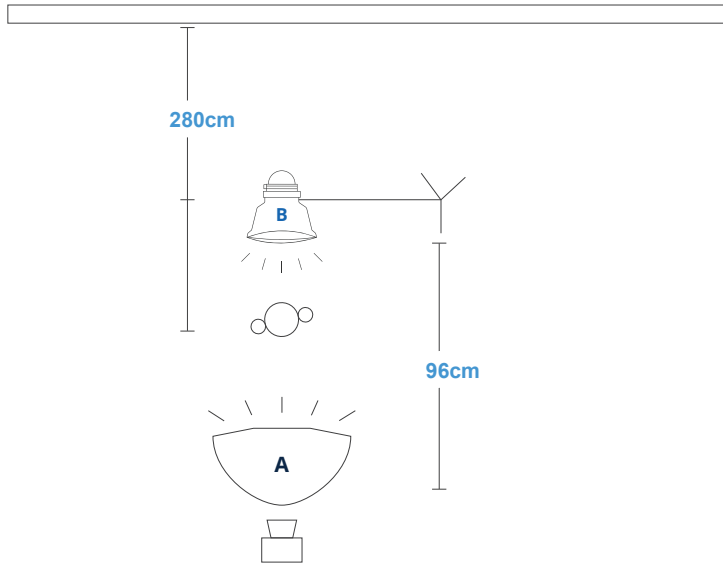

Light	Meter Reading	Gel	Height
A: Rotalux Indirect Octa 150cm (59")	f 8.0	N/A	227cm
B: Hair Light w/ Main Standard Reflector	f 11.1	N/A	203cm

SEKONIC[®]




THE FORMULA

Lighting Tips & Tricks

5 Ways to Use a Softbox - Setup 2

Ab Sesay (@absesay_photo) | Watch at: www.sekonic.com/formula05

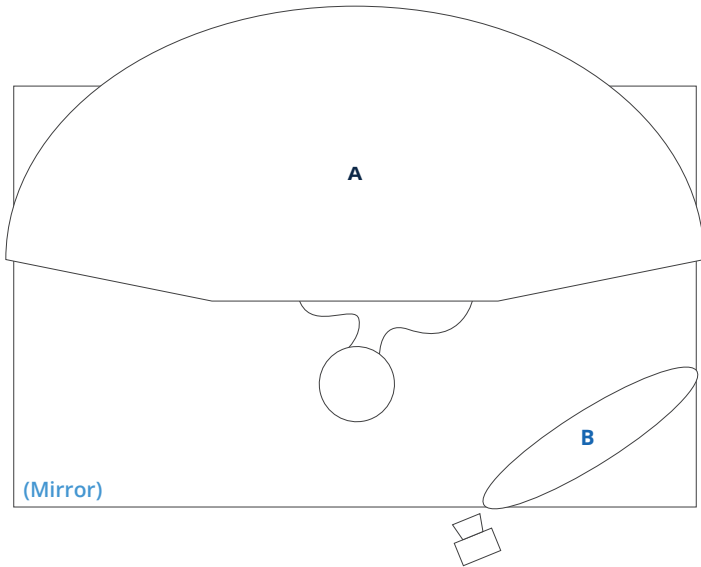

Light	Meter Reading	Gel	Height
A: Rotalux Indirect Octa 150cm (59")	f 20	N/A	127cm
B: Reflector	f 20	N/A	0cm

SEKONIC®




THE FORMULA

Lighting Tips & Tricks

5 Ways to Use a Softbox - Setup 3

Ab Sesay (@absesay_photo) | Watch at: www.sekonic.com/formula05

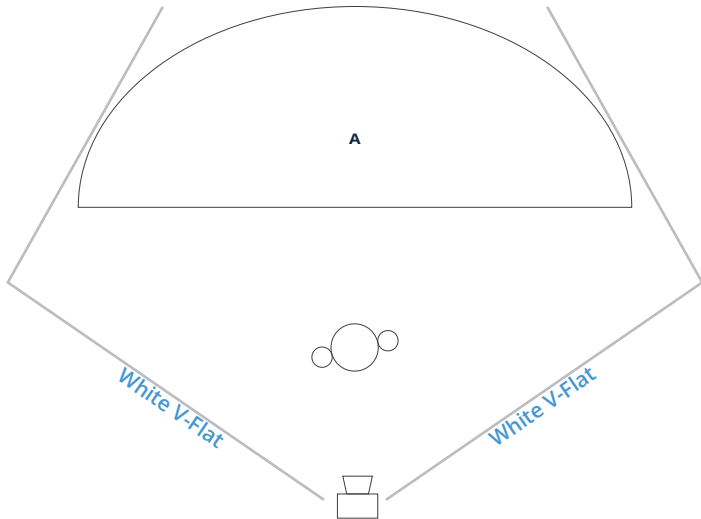

Light	Meter Reading	Gel	Height
A: Indirect	f 18	N/A	229 cm



THE FORMULA


Lighting Tips & Tricks

5 Ways to Use a Softbox - Setup 5.1

Ab Sesay (@absesay_photo) | Watch at: www.sekonic.com/formula05



F 2.8

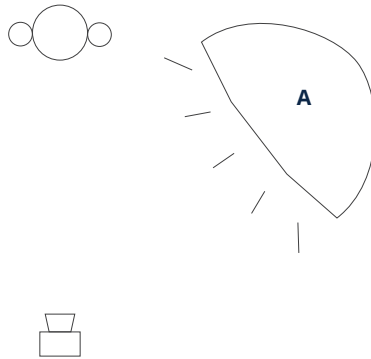

Light	Meter Reading	Gel	Height
A: Rotalux Indirect Octa 150cm	f 8	N/A	Center at eye level



THE FORMULA

Lighting Tips & Tricks

5 Ways to Use a Softbox - Setup 5.2

Ab Sesay (@absesay_photo) | Watch at: www.sekonic.com/formula05



F10



Light	Meter Reading	Gel	Height
A: Rotalux Indirect Octa 150cm (59")	f 18	N/A	Center at eye level

SEKONIC®

Sekonic L-858D-U SpeedMaster

Key Features:

- Ambient & Flash (PC Sync Terminal, Cordless or Optional Wireless Radio Flash) *
- Incident Light and built-in 1°R Spot Metering with Viewfinder
- Photo, Cine, and HD Cine Metering Modes
- HSS Flash & Flash Duration Measurements
- Flash Analyzing Function
- Exposure Profile Function
- All Weather Design
- Filter/Exposure/Calibration Compensation
- Custom Setting
- Runs on Two AA Batteries

*Optional Radio Transmitters available for wireless radio flash measurement compatible with PocketWizard, Elinchrom and Phottix.



SEKONIC[®]
CONTROL LIGHT